


ALNITAK

LED POSTER P1.9 / P2.5 / P3



TAGLIG™
ALNITAK

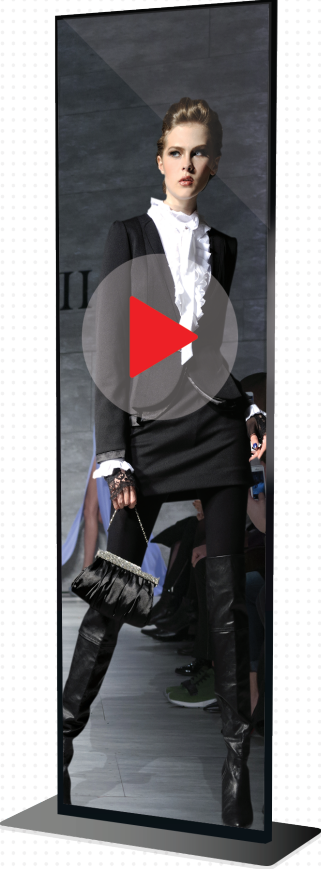

Dijitalleşen dünyanın inovatif ürünleri olan Alnitak serimiz baskılı roll up'lar yerine kullanılabilecek dijital roll up tasarımıyla bir çok alanda kullanıma uygundur.

Yüksek çözünürlüklü kaliteli görüntü verebilen ve tak-çalıştır özelliği ile her yerde kullanılabilen Alnitak; fuarlarda, vitrinde, mağaza önlerinde, mağaza içlerinde yer kaplamadan tüm ürünleri sergileme imkanı sunmaktadır.

Wi-fi ya da USB ile telefondan veya bilgisayardan kolay veri atılabilir; resim, video eklenebilir. LED posterler birleştirilerek tek büyük ekran olarak da kullanılabilir. Indoor kullanıma uygundur.

Genel Özellikleri

- Yüksek Çözünürlük
- Canlı ve Kaliteli Görüntü
- Kolay Servis
- Kolay Taşınabilir, İnce Şık Tasarım



ULTRA
BRIGHT



HIGH
VIEWING ANGLE



OUTDOOR



SLIM
DESIGN



HIGH
REFRESH RATE



EASY
MAINTENANCE



NO GHOST
(CLEAN IMAGE)



ENERGY
SAVING



24/7
USAGE



INDOOR



22 KG



USB



WIRELESS



PLUG & PLAY

OPERATING SYSTEM



iOS

android

Teknik Özellikler

LED POSTER

Pixel	P1.9	P2.5	P3
Led Type	SMD1010	SMD2020	SMD2020
Brightness	900nits/m2	1200nits/m2	1200nits/m2
Refresh Rate	3840Hz	3840Hz	1920Hz
Driving Method	1/26	1/32	1/16
Module Size	250x250	160x160	192x192
Module Resolution	132x132	100X100	100X100
Cabinet Size	600x1950	640x1920	576x1920
Pixel Density	278784	160000	111111
Max. Power	440	440	500
Avg. Power	240	240	300
IC Driver	MBI5153	MBI5153	MBI5124
Power Supply	MEANWELL HSP-320	MEANWELL HSP-320	MEANWELL HSP-320
Module Per Cabinet	39	48	30
Weight Cabinet	22 Kg	22 Kg	22 Kg
Colors	281 Trillion	281 Trillion	281 Trillion
Min. Viewing Distance	1.5 mt	2 mt	2 mt
Horizontal Viewing Angle	140	140	140
Vertical Viewing Angle	140	140	140
Led Lifetime	100.000 hours	100.000 hours	100.000 hours
Input Voltage	110-240V	110-240V	110-240V
Operation Temperature	--40+ 70 C	--40+ 70 C	--40+ 70 C
Ingress Protection	IP54	IP54	IP54
Gray Level	65536	65536	65536

