



SIRIUS

SMART INDOOR - P2.5 / P2.9 / P3.9

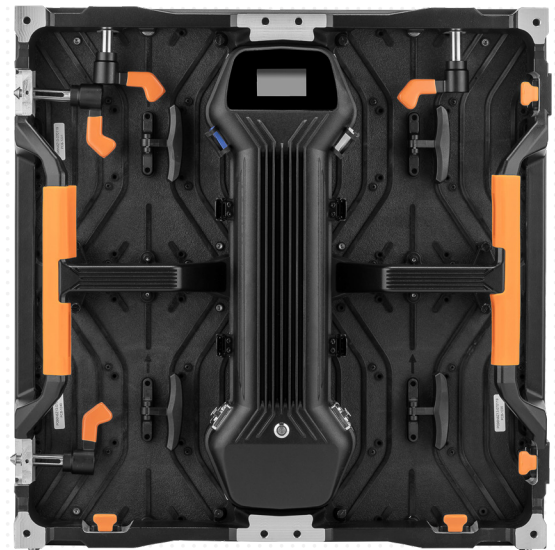

General Properties

- Sturdy Ergonomic Structure
- Front/Back Technical Intervention
- Easy and Powerful Lock System
- Light and Easily Portable Cabin with a 500x500 Measurement
- Handles That Function as Stairs
- 6-Degree Internal and External Curve Property
- Passive Cooling Without a Fan
- Auto-Calibrate Property
- Power Control Box Remove-Attach Ergonomic Design
- Cabin Heat and Voltage Imaging with the Smart LCD
- Work Hours Memory Recording Property
- Single-Person Easy Assembly with Upper and Lower Magnets
- Rental, Fixed, Indoor, and Outdoor

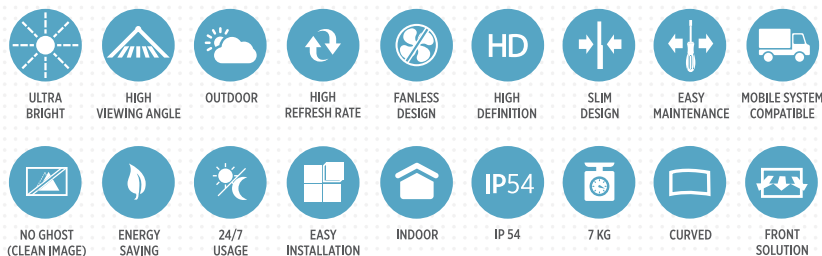

Technical Properties
INDOOR

Pixel	P2.5	P2.9	P3.9
Led Type	SMD2020	SMD2020	SMD2020
Brightness	1200nits/m2	1200nits/m2	1200nits/m2
Refresh Rate	3840Hz	1920Hz	1920Hz
Driving Method	1/21	1/23	1/16
Module Size	250x250	250x250	250x250
Module Resolution	100X100	84X84	64x64
Cabinet Size	500x500	500x500	500x500
Pixel Density	160000	112896	65536
Max. Power	540	490	480
Avg. Power	300	280	300
IC Driver	MBI5153	MBI5124	MBI5124
Power Supply	MEANWELL HSP-320	MEANWELL HSP-320	MEANWELL HSP-320
Module Per Cabinet	4	4	4
Weight Cabinet	7,2 Kg	7,2 Kg	7,2 Kg
Colors	281 Trillion	281 Trillion	281 Trillion
Min. Viewing Distance	2,5 mt	3 mt	4 mt
Horizontal Viewing Angle	140	140	140
Vertical Viewing Angle	140	140	140
Led Lifetime	100.000 hours	100.000 hours	100.000 hours
Input Voltage	110-240V	110-240V	110-240V
Operation Temperature	--40+ 70 C	--40+ 70 C	--40+ 70 C
Ingress Protection	IP54	IP54	IP65
Gray Level	65536	65536	65536

