


SIRIUS

SMART INDOOR - P2.5 / P2.9 / P3.9

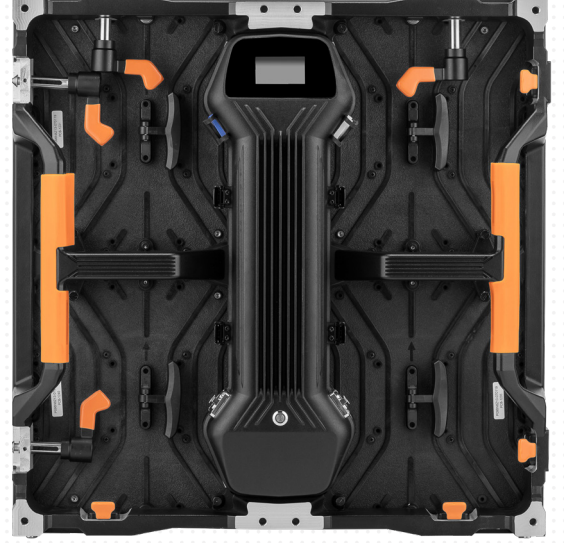

Genel Özellikleri

- Sağlam Ergonomik Yapı
- Ön/Arka Teknik Müdahale
- Kolay ve Güçlü Kilit Sistemi
- 500x500 Ölçüsüyle Hafif ve Kolay Taşınabilir Kabin
- Merdiven Görevi Gören Kulplar
- 6 Derece İç ve Dış Curve Özelliği
- Fansız Pasif Soğutma
- Auto Calibrate Özelliği
- Power Control Box Sök-Tak Ergonomik Tasarım
- Smart LCD ile Kabin Sıcaklığının ve Voltajın Görüntülenmesi
- Çalışma Saatini Hafızaya Kaydetme Özelliği
- Üst ve Alttaki Miknatıslar ile Tek Kişi Kolay Montaj
- Rental, fixed, indoor ve outdoor



ULTRA BRIGHT



HIGH VIEWING ANGLE



OUTDOOR



HIGH REFRESH RATE



FANLESS DESIGN



HIGH DEFINITION



SLIM DESIGN



EASY MAINTENANCE



MOBILE SYSTEM COMPATIBLE



NO GHOST (CLEAN IMAGE)



ENERGY SAVING



24/7 USAGE



EASY INSTALLATION



INDOOR



IP 54



7 KG



CURVED



FRONT SOLUTION

Pixel	P2.5	P2.9	P3.9
Led Type	SMD2020	SMD2020	SMD2020
Brightness	1200nits/m2	1200nits/m2	1200nits/m2
Refresh Rate	3840Hz	1920Hz	1920Hz
Driving Method	1/21	1/23	1/16
Module Size	250x250	250x250	250x250
Module Resolution	100X100	84X84	64x64
Cabinet Size	500x500	500x500	500x500
Pixel Density	160000	112896	65536
Max. Power	540	490	480
Avg. Power	300	280	300
IC Driver	MBI5153	MBI5124	MBI5124
Power Supply	MEANWELL HSP-320	MEANWELL HSP-320	MEANWELL HSP-320
Module Per Cabinet	4	4	4
Weight Cabinet	7,2 Kg	7,2 Kg	7,2 Kg
Colors	281 Trillion	281 Trillion	281 Trillion
Min. Viewing Distance	2,5 mt	3 mt	4 mt
Horizontal Viewing Angle	140	140	140
Vertical Viewing Angle	140	140	140
Led Lifetime	100.000 hours	100.000 hours	100.000 hours
Input Voltage	110-240V	110-240V	110-240V
Operation Temperature	--40+ 70 C	--40+ 70 C	--40+ 70 C
Ingress Protection	IP54	IP54	IP65
Gray Level	65536	65536	65536

