


ALTAIR

INDOOR P5 - OUTDOOR P5 / P10

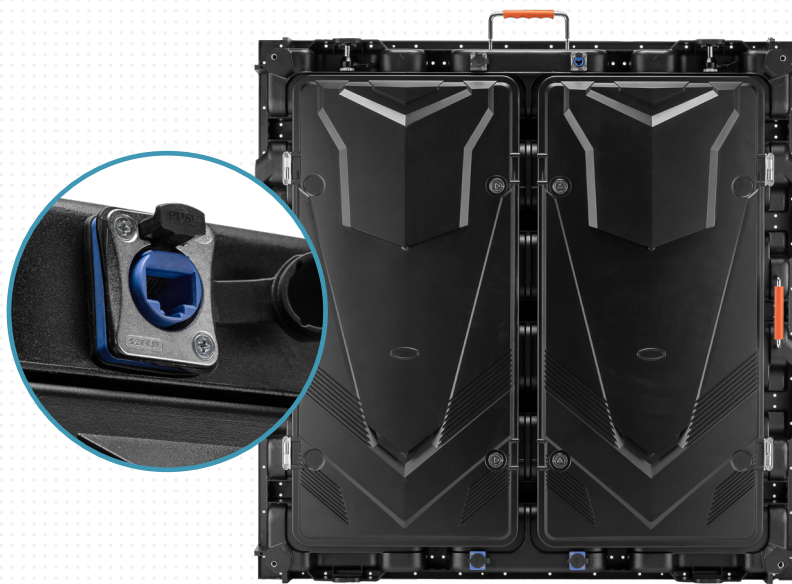

General Properties

- 960x960 Aluminum Diecasting Cabin
- Light and Easily Portable Design
- Thin Structure That Takes Up Little Space
- Easy Installation with Rental System Lock System
- Technical Intervention from Behind
- Cooling With a Fan
- IP67 Socket System (OPT)
- Rental, Fixed, Indoor, and Outdoor



ULTRA BRIGHT



HIGH VIEWING ANGLE



OUTDOOR



HIGH REFRESH RATE



FANLESS DESIGN



HIGH DEFINITION



UEFA READY



EASY MAINTENANCE



MOBILE SYSTEM COMPATIBLE



NO GHOST (CLEAN IMAGE)



ENERGY SAVING



IP 65



24/7 USAGE



EASY INSTALLATION



INDOOR



IP 54



26 KG

Technical Properties	INDOOR	OUTDOOR	
Pixel	P5	P5	P10
Led Type	SMD2020	SMD2727	SMD3535
Brightness	1200nits/m2	6000nits/m2	8500nits/m2
Refresh Rate	1920Hz	1920Hz	1920Hz
Driving Method	1/8	1/8	1/2
Module Size	320X160	320X160	320X160
Module Resolution	64X32	64X32	32X16
Cabinet Size	960X960	960X960	960X960
Pixel Density	40000	40000	10000
Max. Power	540	700	770
Avg. Power	310	380	400
IC Driver	MBI5124	MBI5124	MBI5124
Power Supply	MEANWELL 5V60A	MEANWELL 5V60A	MEANWELL 5V60A
Module Per Cabinet	18	18	18
Weight Cabinet	26 Kg	27 Kg	27 Kg
Colors	281 Trillion	281 Trillion	281 Trillion
Min. Viewing Distance	5 mt	5 mt	10 mt
Horizontal Viewing Angle	140	140	140
Vertical Viewing Angle	140	140	140
Led Lifetime	100.000 hours	100.000 hours	100.000 hours
Input Voltage	110-240V	110-240V	110-240V
Operation Temperature	--40+ 70 C	--40+ 70 C	--40+ 70 C
Ingress Protection	IP54	IP65	IP65
Gray Level	65536	65536	65536

